NACA

RESEARCH MEMORANDUM

LIFT, DRAG, AND STATIC LONGITUDINAL STABILITY

CHARACTERISTICS OF FOUR AIRPLANE-LIKE

CONFIGURATIONS AT MACH NUMBERS

FROM 3.00 TO 6.28

By Stanford E. Neice, Thomas J. Wong,
and Charles A. Hermach

Ames Aeronautical Laboratory
Moffett Field, Calif.

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS
WASHINGTON
April 25, 1955

NASA Technical Library

3 1176 01434 7570

UNCLASSIFIED

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

LIFT, DRAG, AND STATIC LONGITUDINAL STABILITY

CHARACTERISTICS OF FOUR AIRPLANE-LIKE

CONFIGURATIONS AT MACH NUMBERS

FROM 3.00 TO 6.28

By Stanford E. Neice, Thomas J. Wong,
and Charles A. Hermach

SUMMARY

Lift, drag, and pitching-moment coefficients, lift-drag ratios, and
center-of-pressure positions for four airplane-like configurations were
determined from tests at Mach numbers from 3.00 to 6.28 and angles of
attack up to 15°. One basic configuration consisted of trapezoidal-wing
and -tail surfaces mounted on a cylindrical afterbody with a fineness-
ratio-3 tangent-ogive nose. The second basic configuration, designed to
have lower drag and higher lift-drag ratios, consisted of triangular-
wing and -tail surfaces, which have the same spans and plan-form areas
as the trapezoidal-wing model, but with more highly swept leading edges,
mounted on a cylindrical afterbody with a fineness-ratio-5 "minimum-drag"
nose. The third configuration was the trapezoidal-wing model modified
to have a fineness-ratio-5 minimum-drag nose. The fourth configuration
was the triangular-wing model with the minimum-drag nose modified to
include a nose radius one-tenth of the afterbody radius. Wing and tail
sections of all four configurations had rounded leading edges to reduce
the effect of local aerodynamic heating.

Throughout the range of test Mach numbers, the maximum lift-drag
ratios of the basic triangular-wing configuration were about 18 to 24
percent higher than those of the basic trapezoidal-wing model. About 7-
to 11-percent increase in maximum lift-drag ratio was obtained by replac-
ing the fineness-ratio-3 ogival nose of the basic trapezoidal-wing model
with the fineness-ratio-5 minimum-drag nose. Increasing the nose blunt-
ness of the triangular-wing model resulted in a decrease of about 5
percent or less in the maximum lift-drag ratio. The greatest decrease
occurred at the highest test Mach number.

UNCLASSIFIED
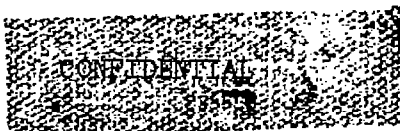
INTRODUCTION

An airplane-like configuration, which consisted of trapezoidal-wing and -tail surfaces mounted on a cylindrical afterbody with a fineness-ratio-3 ogival nose (refs. 1 and 2), has been investigated as a suitable vehicle for flight at high supersonic speeds. Rounded wing and tail leading edges were incorporated in this configuration as being desirable for high-speed operation from the standpoint of keeping the leading-edge temperatures within feasible limits. Test results showed that this configuration had maximum lift-drag ratios of 2.64 and 2.36 at Mach numbers of 4.06 and 6.86, respectively.

It appears that the drag of this configuration could be reduced, with consequent improvement of the maximum lift-drag ratios, by using a minimum-drag nose of higher fineness ratio and by using wing and tail surfaces with more highly swept leading edges. A triangular-wing model which incorporated these changes, and a trapezoidal-wing model, similar in plan form to that used in the tests reported in references 1 and 2, were tested in the Ames 10- by 14-inch wind tunnel to determine their comparative aerodynamic characteristics at Mach numbers from 3.00 to 6.28 and angles of attack up to 15°. Tests were also conducted on the trapezoidal-wing model with the minimum-drag nose (fineness ratio 5) to determine the drag reduction attributed to the nose modification. Since the nose of the body should be rounded to alleviate the local aerodynamic heating problem, the triangular-wing model was also tested with the minimum-drag nose blunted to a radius consistent with the blunting of the wing and tail leading edges.

NOTATION

C_D drag coefficient, $\dfrac{D}{qS}$

C_L lift coefficient, $\dfrac{L}{qS}$

C_m pitching-moment coefficient about wing centroid of area, $\dfrac{m}{qS\bar{c}}$

$\bar{c}$ mean aerodynamic chord of wing including portion submerged in
            fuselage

D drag

f fineness ratio, ratio of body length to maximum diameter

L lift

M free-stream Mach number

m   pitching moment

q   free-stream dynamic pressure

S   wing plan-form area, including area submerged in fuselage

$\bar{x}$ center-of-pressure location, percent body length from nose

α angle of attack

APPARATUS AND TESTS

The models were tested in the Ames 10- by 14-inch wind tunnel which
is described in detail in reference 3. Aerodynamic forces and moments
acting on the models were measured by a three-component strain-gage bal-
ance. Angles of attack up to 5° were obtained by rotating the model-
balance assembly. Angles of attack greater than 5° were obtained by the
use of bent-sting model supports. Axial forces acting on the model base,
as determined by the difference between measured base pressures and free-
stream static pressures, were subtracted from measured total forces.
Thus, the data presented do not include the effects of base pressure.

Models used in the investigation were constructed of steel, with
the tail surfaces permanently pinned to the cylindrical afterbody while
the wings and nose sections were removable. Figure 1 shows the trapezoidal-
wing model which is similar to that used in the tests reported in refer-
ences 1 and 2, but with the following changes: (a) the four wedge-shaped
tail surfaces have been replaced by three tail surfaces with the airfoil
section shown in figure 1; and (b) the configuration has been changed
from a mid-wing type to the low-wing type shown. The modification of this
model in which the fineness-ratio-3 ogival nose is replaced by a fineness-
ratio-5 minimum-drag nose is shown by the dashed lines on this figure.
The ordinates for the minimum-drag nose (minimum drag for given length
and volume, as determined from ref. 4) are given in table I. Figure 2
shows the triangular-wing model which has the same wing and tail surface
areas as the trapezoidal-wing model, but has more highly swept leading
edges as well as the fineness-ratio-5 minimum-drag nose. The modification
to this model, as shown in this figure, consisted of shortening the
fineness-ratio-5 minimum-drag nose to include a nose radius of 1/10 the
maximum body radius. It has been indicated (ref. 5) that a sizable reduc-
tion in local heat-transfer rate can be achieved by sweeping the round
leading edge of a wing or tail. In an attempt to obtain similar conditions
of local heat input, therefore, the leading-edge radii of the triangular
wing and tail have been reduced from those of the trapezoidal wing and
tail as shown in figures 1 and 2.

Lift, drag, and pitching-moment coefficients as well as lift-drag
ratios and center-of-pressure positions were determined for all models

at angles of attack to about 15° at Mach numbers of 3.00, 4.26, 5.04, and 6.28. The free-stream Reynolds numbers based on the lengths of the models were:

Mach number	Reynolds number, million	
	Basic trapezoidal-wing model	All other models
3.00	7.5	9.1
4.26	6.9	8.3
5.04	3.3	4.0
6.28	1.4	1.7

In the region of the test section where the models were located, the variation in Mach number did not exceed ±0.02 at Mach numbers from 3.00 to 5.04 and ±0.04 at Mach number 6.28. Deviations in free-stream Reynolds numbers did not exceed ±100,000 from the values given. Estimated errors in the angle of attack due to uncertainties in corrections for stream angle and for deflection of the model-support system were ±0.2°.

Precision of the experimental results was affected by uncertainties in the force measurements by the balance system and the determination of free-stream dynamic pressures and base pressures. These uncertainties result in maximum possible errors in the aerodynamic force and moment coefficients as shown in the following table:

Mach number	c_D	c_L	c_m
3.00	±0.003	±0.002	±0.005
4.26	±.003	±.002	±.005
5.04	±.004	±.003	±.008
6.28	±.006	±.005	±.015

Accuracy of lift-drag ratios and centers of pressure will depend not only upon the accuracy of the force and moment coefficients but will, in general, be inversely proportional to the magnitude of these quantities. As such, the errors in the lift-drag ratios and centers of pressure will be comparatively large near zero angle of attack and will decrease as the angle of attack is increased.

RESULTS AND DISCUSSION

Results of the tests on the four airplane-like configurations are presented in table II, where lift, drag, and pitching-moment coefficients, centers of pressure, and lift-drag ratios at various angles of attack are tabulated for the several test Mach numbers. In order to show the more important trends and comparisons of these aerodynamic parameters, certain data are also presented in graphical form. The variations of lift with angle of attack of the four models were found to be essentially the same at each test Mach number as may be seen in the tabulated test results. This similarity in lift characteristics is shown for the two basic models in figure 3. It can be shown from this figure that the initial lift-curve slope ($dC_L/d\alpha$ for $\alpha = 0$) is almost inversely proportional to $\sqrt{M^2 - 1}$, varying from a value of about 0.035 per degree at Mach number 3.00 to about 0.017 per degree at Mach number 6.28.

The variations of lift coefficient with drag coefficient, pitching-moment coefficient about the wing centroid of area, and the center of pressure in percent body length measured from the nose are shown in figure 4 for the two basic configurations and for the modified trapezoidal-wing model. The test results for the modified triangular-wing model are not included in this figure since they were approximately the same as those of the basic triangular-wing model, except for relatively small differences in drag coefficient as will be discussed later. In a comparison of the lift and drag coefficients, it can be seen that, for a given lift coefficient, the triangular-wing model has a consistently lower drag coefficient, and thus a higher lift-drag ratio, than does the basic trapezoidal-wing model. The corresponding curves for the modified trapezoidal-wing model show that, in the region of zero lift, about 40 to 50 percent of this difference is due to the use of the more slender minimum-drag nose. This drag reduction due to changing the nose shape is of the magnitude which would be predicted by Newtonian impact theory (ref. 6). The remainder of the drag reduction is due to the increased sweep angles and decreased radii of the wing and tail leading edges of the triangular-wing model.

The static longitudinal stability of each model tends to decrease with increasing Mach number as indicated by the less negative values of dC_m/dC_L. (See fig. 4.) The decreased stability is very likely due in part to a decrease in the effectiveness of the tail surfaces at higher Mach number. The possible need for additional stability at high Mach numbers was anticipated by the use of wedge-shaped tail surfaces on the model used in the tests reported in references 1 and 2. An alternate method for increasing stability at high Mach numbers, with possibly less drag penalty and fewer structural problems, would be to flare the rear portion of the cylindrical afterbody, as suggested in reference 7.

CONFIDENTIAL

The variations of maximum lift-drag ratio with Mach number for the four configurations are presented in figure 5. It can be seen from this figure that the basic triangular-wing model has a maximum value of lift-drag ratio about 18 to 24 percent greater than that for the basic trapezoidal-wing model throughout the range of test Mach numbers. The addition of the fineness-ratio-5 minimum-drag nose to the trapezoidal-wing model increases the maximum lift-drag ratio about 7 to 11 percent in the range of the test Mach numbers. Although the drag of the modified triangular-wing model near zero lift is approximately the same as that of the basic triangular-wing model, as may be seen in the tabulated results, the drag of the modified model, except at a Mach number of 3.00, is slightly higher at the lift coefficients for which the lift-drag ratio is a maximum. This characteristic results in a decrease in maximum lift-drag ratio of about 5 percent at the highest test Mach number. Thus, at the higher Mach numbers, the heat-transfer characteristics are improved at the expense of a reduction of maximum lift-drag ratio.

The decrease in the maximum lift-drag ratios of all models as the Mach number is increased is due primarily to the increased skin-friction drag associated with the decrease of test Reynolds number. For these tests, the effects of skin-friction should be about the same for all models at corresponding Mach numbers and, therefore, should not influence the comparative results.

To facilitate model construction by allowing nose sections to be interchangeable, the afterbody length of all models was kept the same. As a result the models which employed minimum-drag nose sections are 2 inches longer than the basic trapezoidal-wing model and have correspondingly larger body volume. If the volumes of the longer models were made the same as that of the short model by reducing the afterbody length, there should be a negligible change in the lift and drag characteristics and an improvement in the stability characteristics due to a rearward shift in the center of pressure.

CONCLUSIONS

The aerodynamic characteristics of four airplane-like configurations, which have the same wing plan-form area, tail plan-form area, aspect ratio, and body diameter, have been determined at Mach numbers from 3.00 to 6.28 and at angles of attack up to 15°. From the results of these tests the following conclusions are drawn:

1. The lift characteristics of the models are about the same at each Mach number and, as would be expected, the lift-curve slopes decrease as the Mach number is increased.

2. The basic triangular-wing model had a greater nose fineness ratio and greater leading-edge sweep angles than the basic trapezoidal-wing model; both of these changes contributed substantial drag reductions.

CONFIDENTIAL

3. The maximum lift-drag ratios of the basic triangular-wing model are about 18 to 24 percent higher than those of the basic trapezoidal-wing model.

4. A small increase in the bluntness of the minimum-drag nose was found to have a relatively small effect on the aerodynamic characteristics of the triangular-wing model at Mach number 3.00, but resulted in a progressive decrease in maximum lift-drag ratio with Mach number, so that a resultant decrease of about 5 percent occurred at Mach number 6.28.

5. The static longitudinal stability of the models tends to decrease as the Mach number is increased, probably due in part to a decreased effectiveness of the tail surfaces.

Ames Aeronautical Laboratory
　　National Advisory Committee for Aeronautics
　　　　Moffett Field, Calif., Mar. 24, 1955

REFERENCES

1. Dunning, Robert W., and Ulmann, Edward F.: Static Longitudinal and Lateral Stability Data from an Exploratory Investigation at Mach Number 4.06 of an Airplane Configuration Having a Wing of Trapezoidal Plan Form. NACA RM L55A21, 1955.

2. Penland, Jim A., Ridyard, Herbert W., and Fetterman, David E., Jr.: Lift, Drag, and Static Longitudinal Stability Data From an Exploratory Investigation at a Mach Number of 6.86 of an Airplane Configuration Having a Wing of Trapezoidal Plan Form. NACA RM L54L03b, 1955.

3. Eggers, A. J., Jr., and Nothwang, George J.: The Ames 10- by 14-Inch Supersonic Wind Tunnel. NACA TN 3095, 1954.

4. Eggers, A. J., Jr., Dennis, David H., and Resnikoff, Meyer M.: Bodies of Revolution for Minimum Drag at High Supersonic Airspeeds. NACA RM A51K27, 1952.

5. Eggers, Alfred J., Jr., Allen, H. Julian, and Neice, Stanford E.: A Comparative Analysis of the Performance of Long Range Hypervelocity Vehicles. NACA RM A54L10, 1955.

6. Grimminger, G., Williams, E. P., and Young, G. B. W.: Lift on Inclined Bodies of Revolution in Hypersonic Flow. Jour. Aero. Sci., vol. 17, no. 11, Nov. 1950, pp. 675 - 690.

7. Eggers, A. J., Jr., and Syvertson, Clarence A.: Experimental Investi-
    gation of a Body Flare for Obtaining Pitch Stability and a Body Flap
    for Obtaining Pitch Control in Hypersonic Flight. NACA RM A54J13,
    1955.

CONFIDENTIAL

TABLE I.- COORDINATES OF THE "MINIMUM-DRAG" NOSE SECTION

[All values in inches.]

Abcissa	Ordinate
0	0.002
.100	.035
.200	.056
.300	.075
.400	.093
.600	.126
.800	.156
1.200	.211
1.600	.260
2.000	.303
2.400	.343
2.800	.379
3.200	.411
3.600	.440
4.000	.464
4.400	.483
4.800	.491
5.000	.500

CONFIDENTIAL

TABLE II.- EXPERIMENTAL RESULTS

M	α	c_L	c_D	$\frac{L}{D}$	c_m	$\bar{x}$	M	α	c_L	c_D	$\frac{L}{D}$	c_m	$\bar{x}$
(a) Trapezoidal-wing model													
3.00	-1.0	-0.048	0.040	-1.18	0.009	56.0	5.05	-2.0	-0.049	0.035	-1.40	0	51.7
	0	-.012	.039	-.31	.002	55.1		0	-.010	.033	-.32	-.002	47.3
	1.0	.024	.040	.61	-.006	57.1		2.0	.030	.034	.90	-.006	56.1
	2.0	.061	.041	1.49	-.015	57.2		2.9	.055	.036	1.56	-.009	55.2
	4.1	.134	.049	2.76	-.031	56.9		5.0	.099	.042	2.34	-.015	55.0
	6.7	.213	.064	3.33	-.050	56.9		7.0	.148	.053	2.76	-.021	54.8
	8.7	.286	.083	3.46	-.064	56.7		8.0	.176	.062	2.82	-.036	56.1
	10.7	.365	.109	3.35	-.085	56.8		10.0	.230	.079	2.93	-.046	56.1
	12.7	.454	.142	3.20	-.113	57.1		12.1	.288	.100	2.88	-.061	56.3
	13.8	.495	.162	3.06	-.121	57.0							
	14.8	.535	.184	2.91	-.132	57.0							
4.26	-2.0	-.056	.035	-1.61	.004	53.2	6.28	-2.0	-.040	.037	-1.08	.001	52.4
	0	-.012	.034	-.37	.001	54.4		0	-.009	.035	-.24	.001	54.8
	1.9	.037	.034	1.07	-.006	55.6		2.0	.026	.036	.73	.006	46.3
	3.1	.068	.037	1.81	-.014	56.3		2.9	.045	.036	1.25	-.003	53.2
	5.1	.117	.045	2.61	-.021	55.7		4.9	.082	.042	1.95	-.006	53.2
	7.0	.172	.056	3.06	-.033	55.9		6.9	.125	.052	2.42	-.017	54.7
	8.2	.206	.065	3.18	-.042	56.2		7.9	.143	.057	2.53	-.008	52.9
	10.2	.264	.084	3.15	-.052	56.0		9.9	.189	.071	2.66	-.013	53.3
	12.1	.323	.107	3.02	-.062	55.9		11.8	.246	.089	2.77	.033	54.6
								12.9	.270	.100	2.70	-.031	54.2
(b) Modified trapezoidal-wing model													
3.00	-1.0	-.047	.036	-1.29	.006	62.6	5.05	-2.0	-.048	.028	-1.70	-.003	58.8
	0	-.011	.035	-.32	0	60.3		0	-.008	.027	-.31	-.003	52.5
	1.0	.028	.035	.80	-.007	64.7		2.0	.034	.027	1.22	-.002	61.4
	2.0	.063	.036	1.73	-.014	64.2		2.9	.058	.033	1.76	-.003	61.2
	4.1	.136	.043	3.15	-.026	63.7		5.0	.103	.040	2.58	-.006	61.1
	6.7	.221	.062	3.57	-.043	63.7		7.0	.154	.051	3.02	-.011	61.4
	8.2	.298	.082	3.63	-.056	63.5		9.0	.179	.059	3.04	-.017	61.9
	10.7	.382	.108	3.54	-.072	63.5		10.0	.235	.076	3.10	-.022	61.8
	12.8	.473	.144	3.28	-.089	63.5		12.1	.296	.098	3.03	-.029	61.8
	14.9	.561	.188	2.98	-.103	63.4							
4.26	-2.0	-.056	.031	-1.82	.003	61.0	6.28	-2.0	-.042	.033	-1.27	-.006	57.4
	0	-.011	.028	-.41	.002	63.2		0	-.011	.031	-.35	-.001	58.9
	1.9	.038	.029	1.30	-.003	61.7		2.0	.025	.032	.79	.003	57.8
	3.1	.069	.033	2.09	-.010	62.7		2.9	.047	.035	1.34	.015	54.2
	5.0	.118	.040	2.93	-.013	62.2		4.9	.088	.043	2.05	-.001	60.4
	7.0	.177	.051	3.46	-.026	62.8		6.9	.131	.053	2.43	-.005	60.8
	8.2	.217	.063	3.44	-.026	62.3		7.9	.145	.053	2.76	.003	59.8
	10.4	.277	.086	3.22	-.034	62.3		9.9	.193	.064	3.03	.003	59.8
	12.5	.335	.111	3.02	-.030	61.7		11.9	.246	.081	3.04	-.005	60.5
								12.9	.273	.092	2.96	-.011	60.8
(c) Triangular-wing model													
3.00	-.9	-.043	.029	-1.48	.007	63.6	5.05	-2.0	-.049	.026	-1.93	.002	61.1
	0	-.008	.028	-.28	.002	64.6		0	-.010	.024	-.41	.003	67.3
	1.0	.029	.028	1.03	-.006	64.0		1.0	.010	.024	.43	.003	53.5
	2.0	.066	.030	2.14	-.014	64.4		2.0	.031	.025	1.25	.008	55.1
	4.1	.140	.038	3.71	-.030	64.6		2.9	.058	.025	2.30	-.007	62.7
	6.7	.220	.056	3.96	-.043	64.1		5.0	.104	.033	3.19	-.009	61.9
	8.7	.295	.074	3.95	-.059	64.3		7.0	.154	.044	3.53	-.016	62.3
	10.7	.369	.101	3.65	-.070	64.0		8.0	.183	.050	3.67	-.020	62.4
	12.7	.453	.133	3.41	-.088	64.0		10.0	.239	.067	3.56	-.025	62.2
	13.8	.488	.152	3.21	-.085	63.6		12.1	.300	.089	3.38	-.032	62.3
	14.8	.526	.173	3.04	-.089	63.5							
4.26	-2.0	-.055	.026	-2.14	.003	61.2	6.28	-2.0	-.041	.030	-1.39	.003	61.8
	0	-.008	.023	-.35	-.001	58.6		0	-.007	.027	-.27	.006	76.9
	1.0	.015	.024	.64	-.001	61.6		1.0	.009	.027	.35	.006	46.9
	1.9	.040	.025	1.61	-.004	61.9		2.0	.027	.028	.97	.005	56.3
	3.1	.072	.026	2.68	-.012	63.5		2.9	.046	.027	1.69	.004	58.3
	5.0	.118	.032	3.70	-.012	62.2		4.9	.086	.033	2.58	-.004	60.9
	7.0	.178	.045	3.97	-.026	63.2		6.9	.128	.040	3.18	.002	59.9
	8.2	.210	.056	3.78	-.022	62.2		6.9	.131	.044	2.98	-.016	62.5
	10.2	.272	.076	3.60	-.027	62.1		7.9	.151	.046	3.30	-.009	61.3
	12.1	.331	.099	3.35	-.028	61.8		9.9	.201	.061	3.28	-.015	61.6
								11.9	.251	.080	3.15	-.021	61.8
								12.9	.278	.092	3.02	-.024	61.9
(d) Modified triangular-wing model													
3.00	-1.0	-.042	.029	-1.45	.007	63.6	5.05	-2.0	-.047	.024	-1.99	0	59.9
	0	-.007	.028	-.25	.001	62.8		0	-.009	.022	-.38	-.003	51.8
	1.0	.030	.028	1.06	-.006	64.4		1.0	.011	.022	.51	-.004	67.6
	2.0	.067	.030	2.19	-.014	64.6		2.0	.032	.023	1.38	-.004	62.9
	4.1	.141	.039	3.65	-.031	64.6		2.9	.056	.026	2.23	-.004	61.4
	6.7	.220	.055	3.98	-.044	64.2		5.0	.103	.033	3.10	-.008	61.6
	8.7	.296	.075	3.95	-.058	64.1		7.0	.153	.045	3.42	-.013	61.8
	10.7	.373	.100	3.72	-.071	64.0		8.0	.182	.052	3.50	-.022	62.6
	12.8	.457	.132	3.46	-.091	64.1		10.0	.237	.070	3.40	-.028	62.5
	14.9	.532	.171	3.10	-.092	63.6		12.1	.296	.093	3.20	-.039	62.8
4.26	-2.0	-.055	.025	-2.23	.005	61.8	6.28	-2.0	-.042	.027	-1.56	-.002	59.3
	0	-.009	.022	-.42	.001	61.4		0	-.009	.024	-.38	.002	64.2
	.9	.015	.022	.67	-.002	62.3		1.0	.008	.024	.31	.004	48.5
	1.9	.040	.024	1.65	-.005	62.8		2.0	.025	.025	.98	.002	58.7
	3.1	.070	.027	2.59	-.010	63.0		2.9	.045	.026	1.70	-.004	58.1
	5.0	.121	.035	3.43	-.015	62.7		4.9	.083	.032	2.57	-.005	61.3
	7.0	.179	.047	3.78	-.026	63.0		6.9	.126	.042	2.94	.001	59.9
	8.2	.217	.058	3.75	-.036	63.5		6.9	.126	.042	2.97	.018	63.1
	10.2	.276	.078	3.54	-.040	63.0		7.9	.153	.048	3.06	-.009	61.4
	12.1	.337	.103	3.27	-.043	62.7		9.9	.203	.062	3.11	-.017	62.0
								11.9	.258	.081	2.95	-.024	62.1

Wing: Aspect ratio 3.0
planform area 10.0 sq in.
(incl. area submerged in fuselage)

Moment reference

Mean aerodynamic chord

.448

11.4°

4.911

38.8°

Tangent point

.0055c radius

.050 c

5.7°

3.6°

.025 c

.20 c

.60 c

.20 c

c

Wing and tail sections

Radius = 9.250

9.8°

27.9°

.318

.375

.0001

2.170

1.353

2.000

3.000

3.200

3.300

11.500

Note: All dimensions in inches
(except as noted).

.1721

.125

.370

36.7°

10.0°

Modified configuration using
Minimum-drag nose (see table I)

1.500

1.500

.0625 radius

20.0°

5.478

(b)

(a)

Figure 1.- Dimensions of trapezoidal-wing model.

Wing: Aspect ratio 3.0
planform area, 100 sq. in.
(Incl. area submerged in fuselage)

Moment reference

Mean aerodynamic chord

6.911

5.000

1.911

Tangent point

.0044 c radius

.050 c

6.1°

3.6°

.025 c

Minimum-drag nose
(see table I)

53.1°

48.4°

1.658

.375

.20c

.60 c

.20 c

c

2.434

Wing and tail sections

4.477

3.648

3.375

Note: All dimensions in inches
(except as noted).

2.076

.125

54.7°

5.478

Modified configuration having
.050 nose radius

1.500

.0625 radius

20°

1.500

.120

Figure 2.- Dimensions of triangular-wing model.

(a) M = 3.00

(b) M = 4.26

(c) M = 5.04

(d) M = 6.28
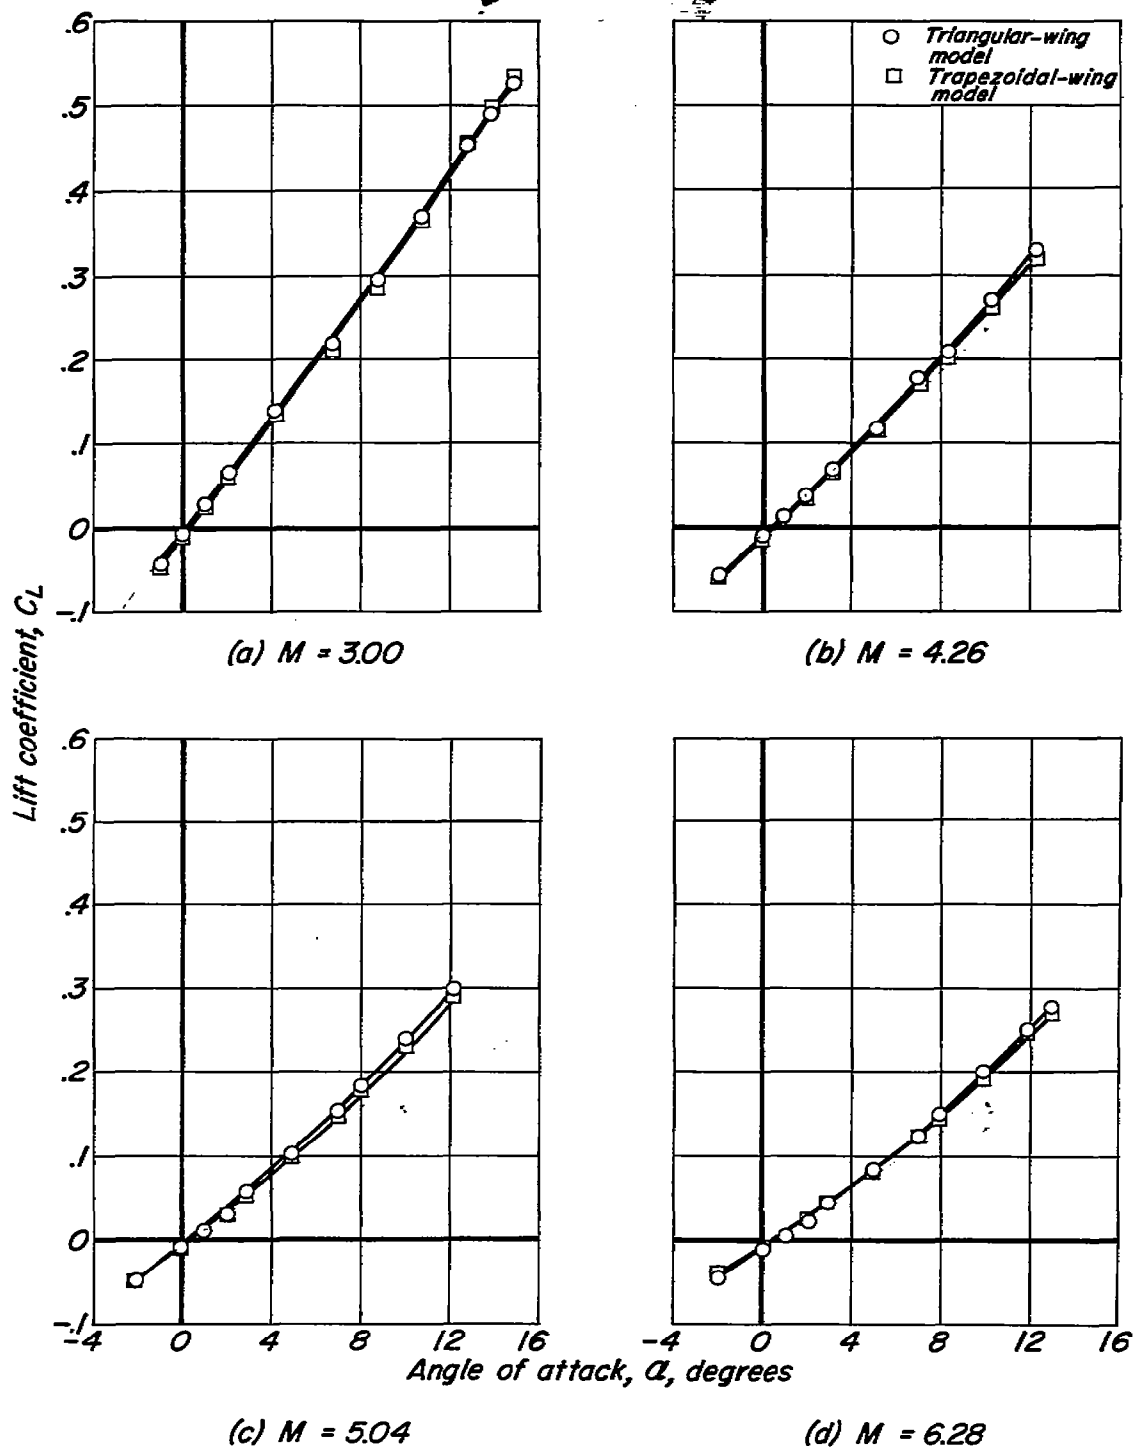
Figure 3.- Variation of lift coefficient with angle of attack for basic test models.

○ Triangular-wing model

□ Trapezoidal-wing model

△ Modified trapezoidal wing model

Lift coefficient, C_L

Drag coefficient, C_D

Pitching-moment coefficient, C_m

Center of pressure, $\bar{x}$

(a) M = 3.00
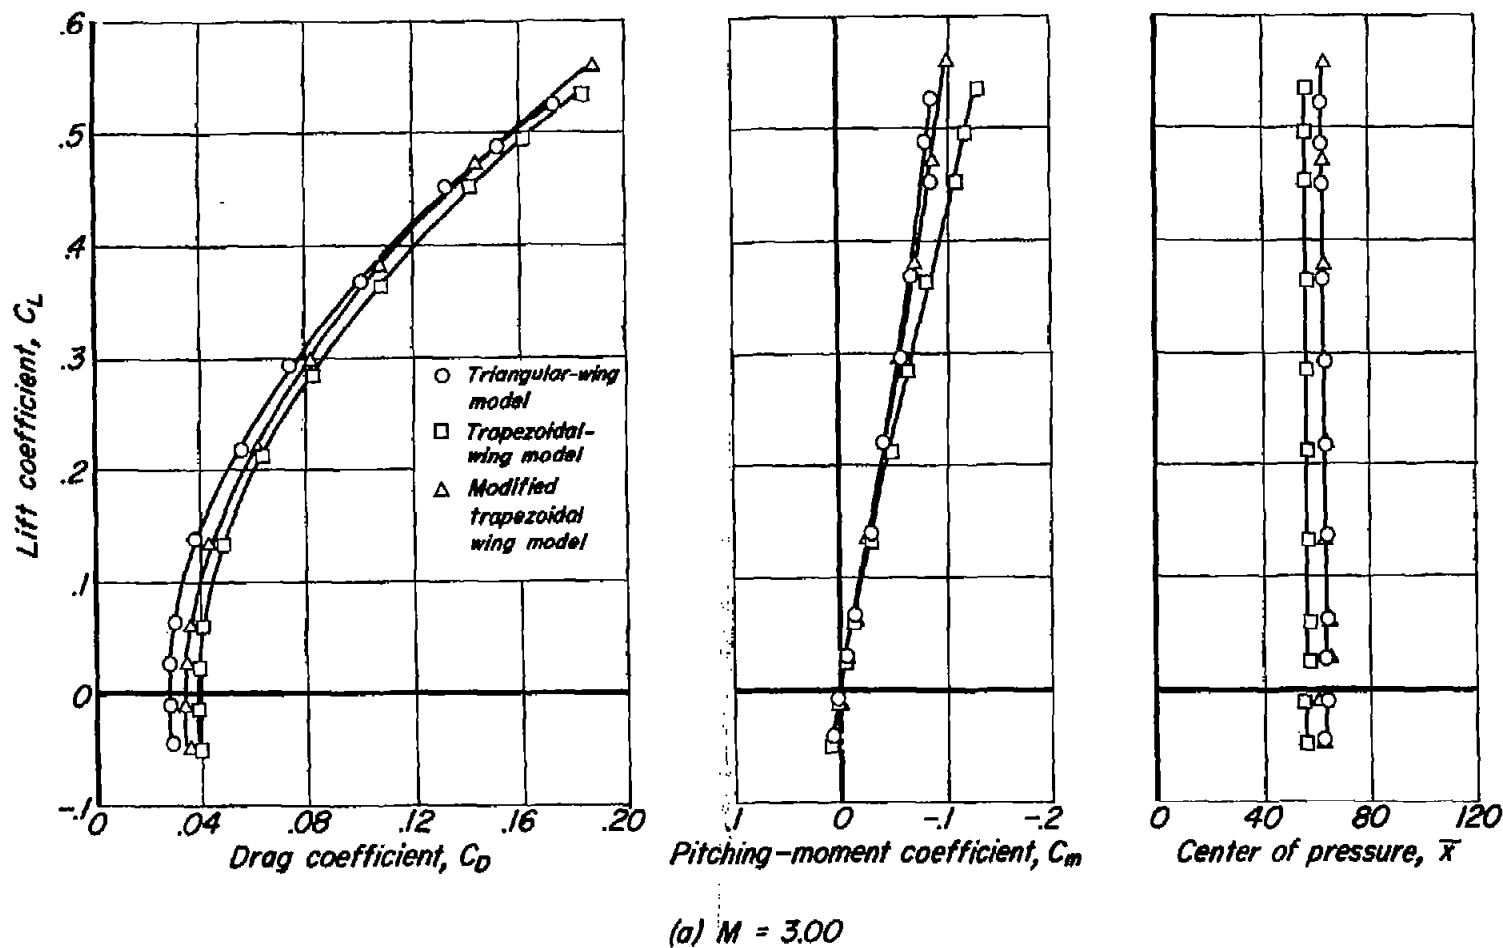
Figure 4.– Aerodynamic characteristics of three test models (modified triangular-wing model omitted).
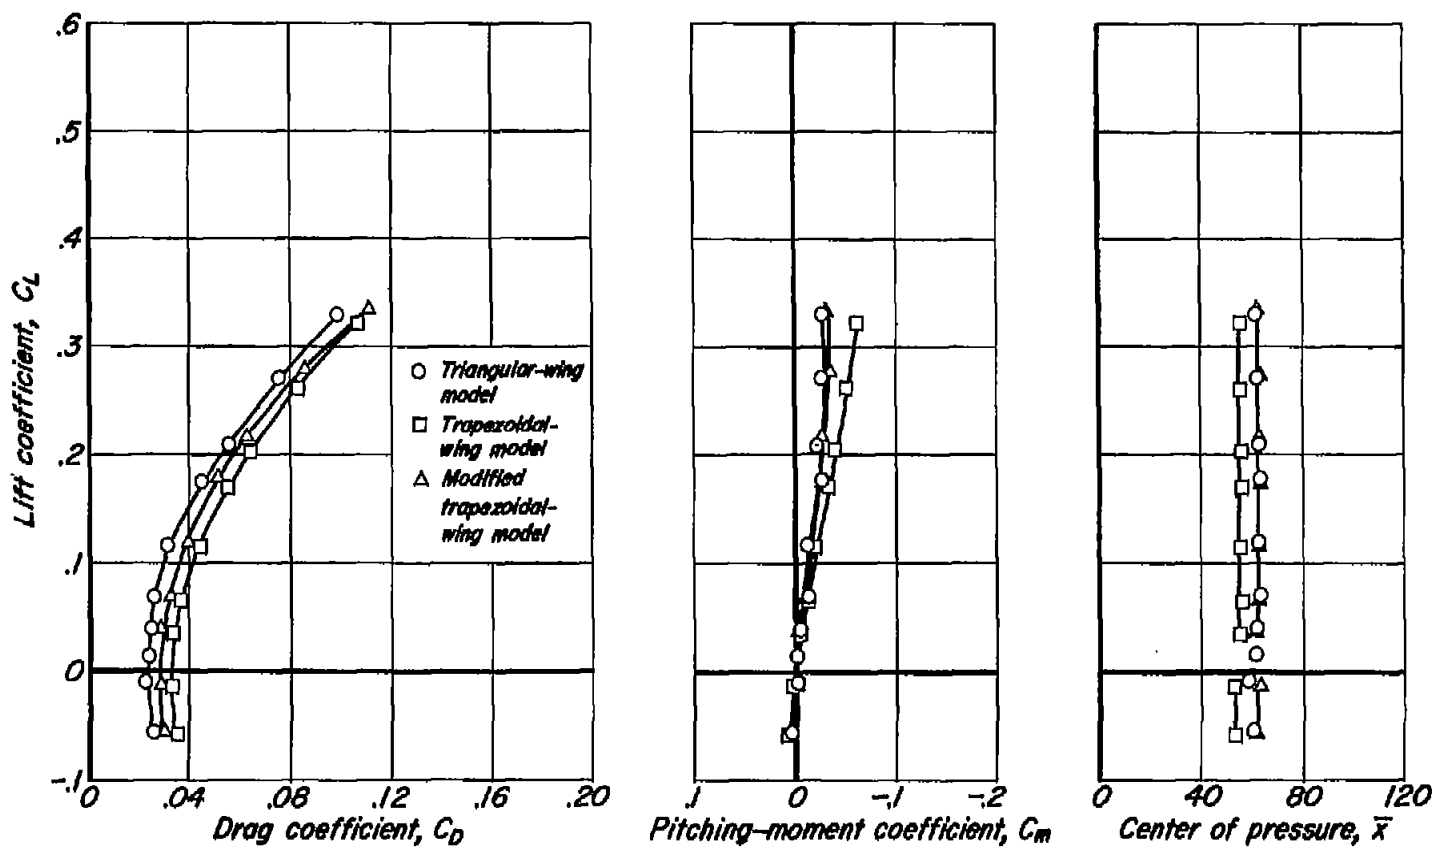
(b) M × 4.26

Figure 4.– Continued.
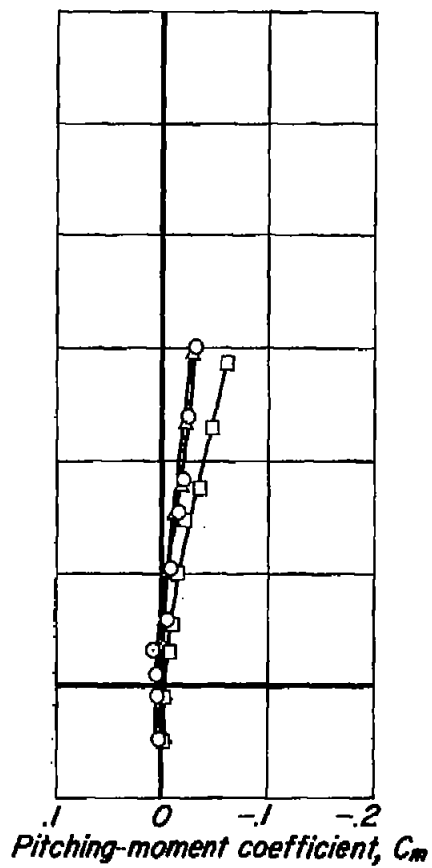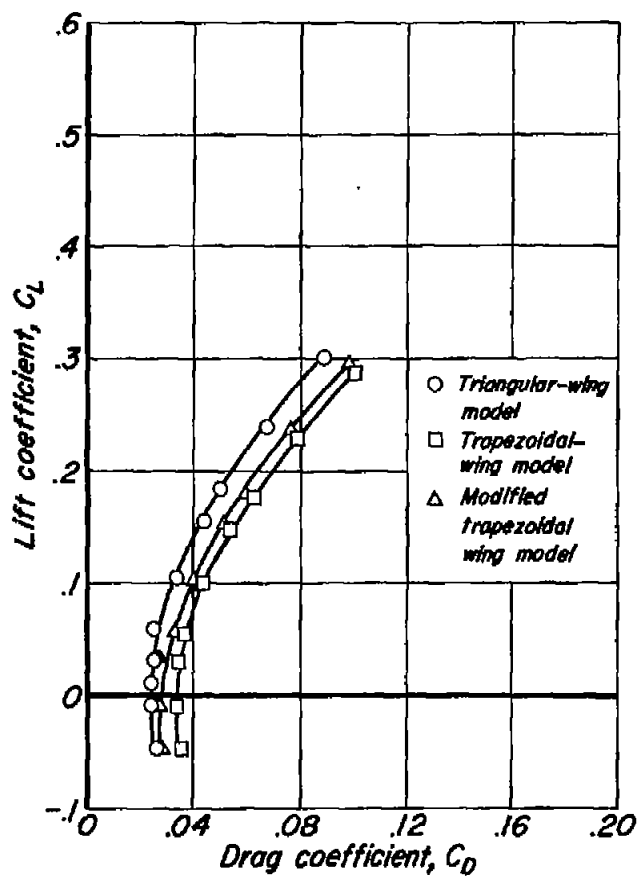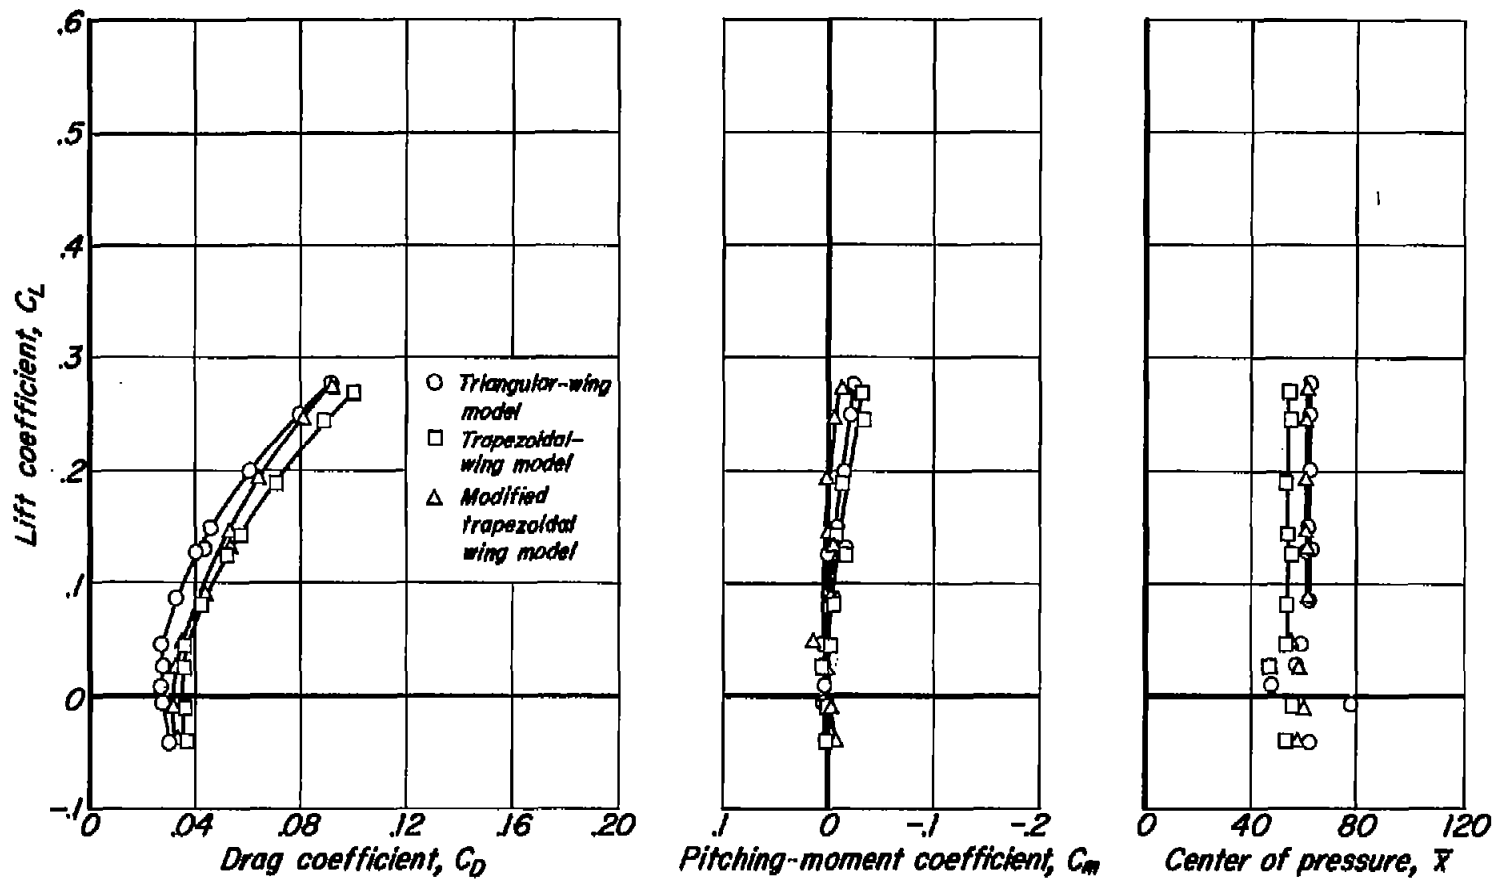
(c) M = 5.04

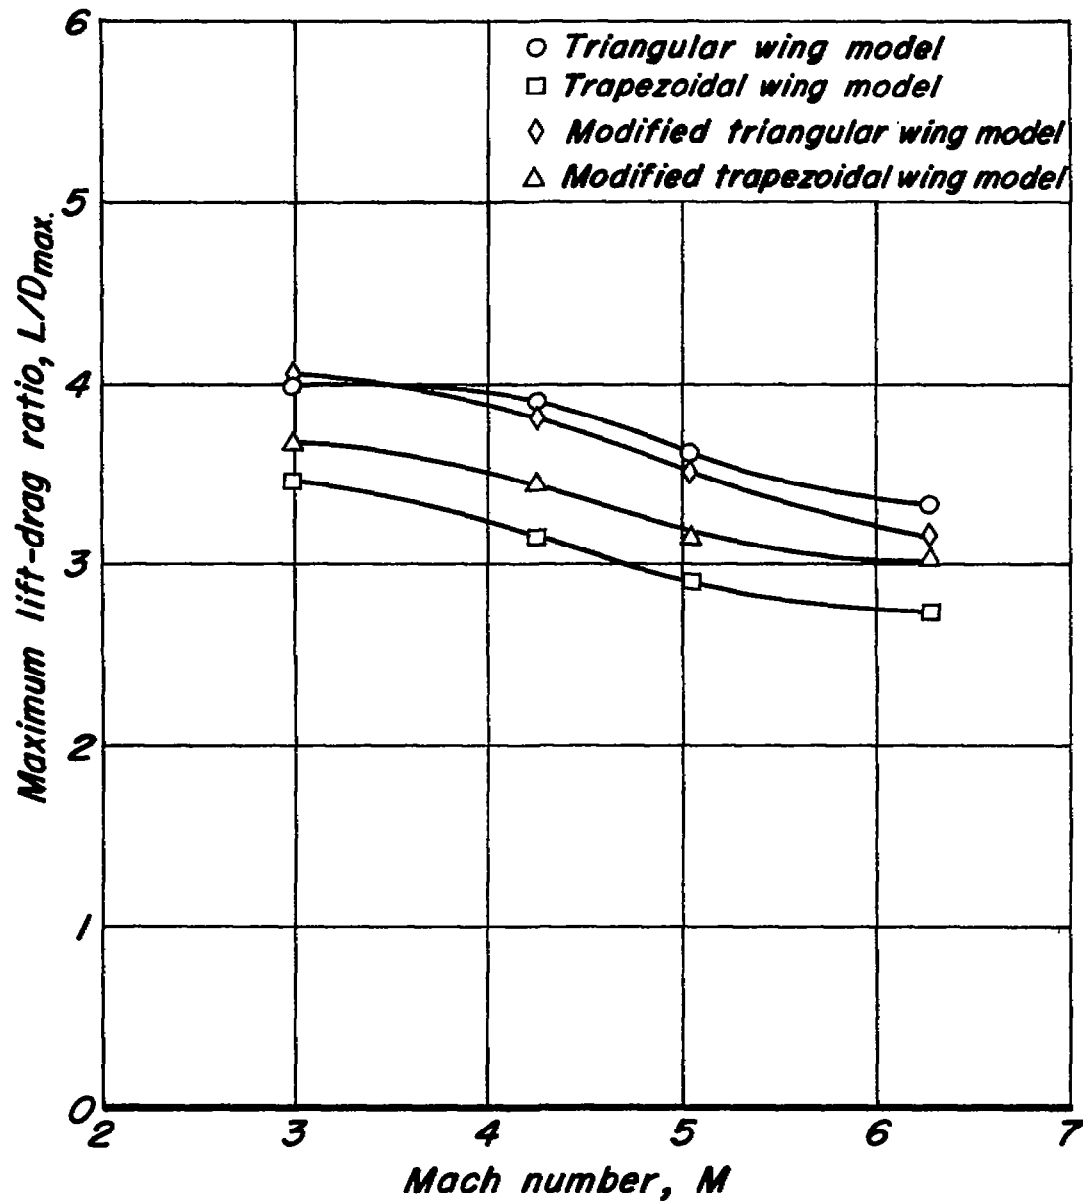Figure 4.- Continued.

(d) M = 6.28

Figure 4.- Concluded.

Figure 5.- Variation of maximum lift-drag ratio with Mach number for all models.